CONNECTED ACCESS PORTAL, WITH VIDEO

1 0



Smart Access Control Software

135-Degree Field of View

10", 720p High-Def Interface with Picture-in-Picture

SMART

INTUITIVE INTERFACE WITH COLOR TOUCH DISPLAY FOR SUPERIOR RESIDENT AND GUEST USABILITY.

CUSTOMIZABLE BACKGROUND ON A 10", FULL-COLOR, 720p HIGH-DEFINITION SCREEN WITH PICTURE-IN-PICTURE.

REMOTE PROGRAMMING AND ACTIVITY MONITORING USING myQ BUSINESS.

CONFIGURABLE EMAIL NOTIFICATIONS: KNOW WHEN CODES ARE OVERUSED OR IF SERVICE IS NEEDED FOR THE CAPXLV, CAP2D OR GATE OPERATOR.

ELIMINATE TRENCHING WITH WI-FI® AND WIRELESS LINK TO LIFTMASTER® GATE OPERATORS.

RELIABLE

VOICE OVER IP (VOIP) PROVIDES CRYSTAL-CLEAR CALL QUALITY WITH NO LONG-DISTANCE CHARGES.

STAINLESS STEEL FOR A MODERN, DURABLE DESIGN.

LOCAL SYSTEM MEMORY ALLOWS RESIDENTS TO ENTER EVEN WHEN THE INTERNET IS DOWN.

SECURE

VIDEO AT ENTRANCE CAN IDENTIFY CULPRITS CAUSING DAMAGE, VANDALISM OR NUISANCES.

REAL-TIME ACTIVITY TRACKING WITH myQ BUSINESS.

CLOUD-BASED SECURITY KEEPS DATA PROTECTED AND SAFEGUARDS RESIDENT INFORMATION.

Cloud-based access control for residential communities.


TOTAL SOLUTION ACCESSORIES:

CONNECTED ACCESS PORTAL, 2-DOOR CONTROLLER

Cloud-based, credentialed access control.



CELLULAR 4G/LTE MODEM





TRIM KIT AND BACK KIT

Conceal openings left from other systems in flush-mount, infinity L and icon installations.



PASSPORT REMOTE CONTROLS

PPV3M/PPK3PHM/PPLK1-X Visor and keychain remotes with unique credentialed IDs.



multiclass® SE RP10 MINI **MULLION AND PROXIMITY CARD**

I MMC-MINI Reader and LMPC2-ST Proximity Card for credentialed access.



RFID LONG-RANGE READER AND VEHICLE TAGS

LMSC1000/LMUNTG/LMHNTG Reader, universal tag (windshield/ headlamp) and hang tag.



USB CAMERA KIT

Upgrade a CAPXL with video. Kit includes camera module and mounting bracket.



GATE OPERATORS

CSW24UL/CSL24UL/HCTDCUL Ensure quick and safe access for residential communities. Pair with CAPXLV for remote system diagnostics.







CAPXLTH

PASSPORT PROXIMITY SYSTEM

MASTERFUL ENGINEERING.

CONNECTED ACCESS PORTAL, WITH VIDEO

CAPACITIES



- -4 Controlled Gates/Doors
- -Wireless Link for up to 8 LiftMaster® Operators
- -4 to 8 Digit Entry Codes
- -4 to 6 Digit Directory Codes
- -50,000 Local Resident Capacity DIMENSIONS
- -50,000 Local Event History
- -Multiple, Holiday and Hold-Open Scheduling, Including One-Time and Repeating Exceptions
- Compatible Wiegand Formats: 26- and 30-Bit
- No Facility Code Limitations (1-256 for 26-Bit); "Ignore Facility Code" Option Available



POWER

-CAPXLV:

Included)

- UL® Listed

- Output 3 Amps

18" x 14" x 4.5"

- Input 120VAC Relay

Outputs (Transformer

-CAPXLTK (Outer Trim): 23.75" x 19.375"

MECHANICS




- -10", 720p High-Definition Touch Display with Picture-in-Picture
- Fade- and Glare-Resistant Display
- Outdoor Stainless-Steel Housing, Brushed Finish on Front Door, Powder-Coated Rear Housing
- -Built-In Security+ 2.0® Radio
- Postal Lock Provision
- Surface, Flush (CAPXLTK) or Pedestal (PED42, PED64) Mount

Community by myQ® App

Residents can visually engage with guests and feel secure about whom they are granting/ denying access.

USB CAMERA SPECIFICATIONS Video Resolution: 1080p Field of View: 135° Video Storage: Locally and in the Cloud

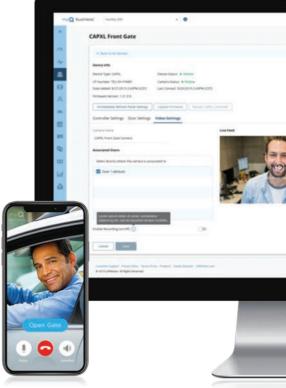

myQ Business™ Video Capabilities Live Streaming and Video Storage

Video services provide a live stream from an entrance through the myQ Business portal and capture 30 seconds of video clips for every access event. Archived clips are stored.

STANDARD SPECS.

COMMUNICATION INTERNET (DYNAMIC OR STATIC IP)

- Wi-Fi®
- High Speed
- -DSL with at Least 1 MB Download Speed
- Cellular (Optional CAPCELL)

VOICE

- VoIP (Voice over IP)
- -Phone.com® Service Required for VoIP

ONBOARD RADIO

- Security+ 2.0 for Passport Remote Controls
- Wireless Link to UL 325 Gate Operators Manufactured After October 2017
- Retrofit Kits Will Be Available for Operators Manufactured Between January 2016 and October 2017
- HomeLink® IV and V Compatible*

*Requires HOA or Management Assistance

WARRANTY

-2-Year

INPUT PORTS

- 4 Wiegand Inputs
- 4 Request-to-Exit (REX) Inputs
- 4 Supervised Inputs
- -1 Auto-Call Input (Requires LPEXP)

OUTPUTS

- 4 Primary Relays
- 4 Auxiliary Relays
- -1 Wiegand Output

OPERATING -20°F to 130°F **TEMPERATURE** (-29°C to 54°C)

SHIPPING.

SHIPPING WEIGHT (in lbs.)



CARTON (1)

23" x 18" x 9"

- CAPXLV
- 24VDC Power Supply
- 2 Keys
- Radio Antenna
- Wi-Fi Antenna
- Misc. Hardware

For Support Tools and Training Videos, Visit LiftMasterTraining.com

For More Information, Visit LiftMaster.com/AccessControl

Sales Support: 800.282.6225

Technical Support Center: 800.528.2806 LiftMasterDealer.CustHelp.com/App/Ask

© 2020 The Chamberlain Group, Inc. All Rights Reserved, LiftMaster, the LiftMaster logo, mvQ and the mvQ logo are registered trademarks of The Chamberlain Group, Inc. 300 Windsor Drive, Oak Brook, IL 60523 LiftMaster.com Wi-Fi® is a registered trademark of Wi-Fi Alliance

UL® and the UL logo are trademarks of UL LLC © 2020 All Rights Reserved. HomeLink® and the HomeLink House® logo are registered trademarks of Gentex Corporation © 2020 HID Global Corporation/ASSA ABLOY AB. All rights reserved. Copyright @ 2020 Phone.com® LMPENPGCAPXLV 2/20

